

# COMPAC®

MANUFACTURER SINCE 1946



**NEW**  
VERY LOW PROFILE  
SEE PAGE 12



**NEW**  
✓ AIR HYDRAULIC  
✓ FAST LIFTING UNDER LOAD  
✓ EASY MANOEUVERING  
SEE PAGE 16 + 17



## CATALOGUE NO 11B



# TABLE OF CONTENTS



How Compac creates value

4-7



Low height jack 2 ton

8



Extremely low chassis jack 2 ton

9



Jack for vans, 4WDs and minibuses 3 ton

10



High capacity jacks 4 - 15 ton

11



High lift jacks 1,4 - 2 ton

**NEW PRODUCT**

12



High lift jacks 3 -10 ton

13



Air hydraulic jacks

**NEW PRODUCT**

14-15



Air hydraulic jacks 1,6 - 10 ton

**NEW PRODUCT**

16-18



Hydraulic body repair kits

19



Wheel lifter for cars, vans and 4WD

20



Wheel dolly and wheel lifter for trucks and buses

21



Wheel lifter for agricultural and earth moving machinery

22-23



Workshop cranes

24-25



Universal transmission jacks

Accessories for transmission jacks

26-27



Telescopic transmission jack for cars, vans and 4WD

28



Telescopic transmission jack for trucks and buses

29



Spring compressor

30-31



Foot operated workshop presses 16 - 25 ton

32



Hand operated workshop presses 20 - 25 ton

33



Foot operated workshop presses 40 - 50 ton

34



Hand operated workshop presses 40 - 100 ton

35



Electro-hydraulic workshop presses 40 - 100 ton

36-37




Axle stands 2 - 12 ton

Bottle jacks 3 - 50 ton

38



# HOW COMPAC CREATES VALUE Lifting is serious business – We know!

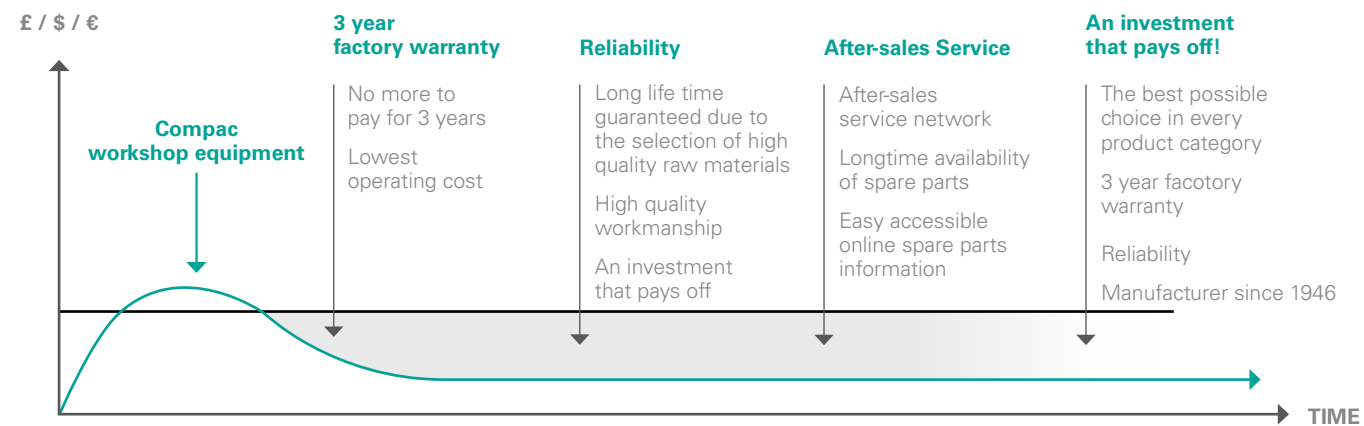

## HISTORY

Four dedicated Danes established Compac in 1946. Their vision was to build superior hydraulic jacks. Our vision is still the same after more than 70 years in business and we are proud to continue in our efforts to strengthen our reputation for superior quality, which we have built up over the years.



**KNOW-HOW IS THE DIFFERENCE**



## FACTORY WARRANTY

Compac has set a benchmark in the industry by being the first manufacturer to offer a full 3 year warranty.



## MANUFACTURER SINCE 1946

Compac has been manufacturing high quality hydraulic products since 1946. The aim of the experienced engineering staff at Compac is to ensure excellent quality with the key objective of creating satisfied customers.





## EXCELLENT RAW MATERIALS

Compac's hydraulic components are manufactured in-house using high quality materials. Important raw materials like the special hydraulic tubes, seals, valve blocks, etc. are sourced from high quality raw material suppliers only. There are no compromises concerning the quality of the critical raw materials used in Compac's hydraulic systems.

## LONGTIME AVAILABILITY OF SPARE PARTS

Spare parts and wear parts for Compac products are easy to identify and access. Information about spare parts for all Compac products is easily available on [www.compac.dk](http://www.compac.dk) or by using Compac's App.



## UNIQUE QUALITY SYSTEM

Compac operates a unique quality system that is inspired by the Japanese quality approach. The stringent quality system combines the quality mind-set and personal responsibility of everyone involved in the manufacturing process.



## ONLINE INFORMATION

Easy access to all spare parts information. Find the right solution for the job. YouTube films for clear understanding of the user benefits. Operation instructions and trouble shooting guides with step-by-step guides to help you solve any functional problems on-site.



**COMPAC**

MANUFACTURER SINCE 1946





# LOW HEIGHT JACK 2 TON CARS



# EXTREMELY LOW CHASSIS JACK 2 TON CARS



Ideal for lifting points along side panels.



Model	Max (ton)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Kg
2T-C	2	80	500	730	160	380	925	36

## ACCESSORIES



**1002LF**  
Rubber pad protects the lifting point.





**3068**  
Saddle for extra height or accessing lifting points situated behind skirts, etc. (+ 40 mm)



**60245**  
Hard rubber wheels. (Factory mounted)



**Bogie PU**  
Noiseless polyurethane rollers and wheels. (Factory mounted)



YouTube

Keyword:  
Compac 2T-77



Extremely low chassis improves access under low vehicles.



Long reach chassis improves access to lifting points deep under vehicles.



Model	Max (ton)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Kg
2T-77	2	77	480	950	126	380	925	41

## ACCESSORIES



**1077**  
Rubber pad protects the lifting point.




**3068**  
Saddle for extra height or accessing lifting points situated behind skirts, etc. (+ 40 mm)



**60245**  
Hard rubber wheels. (Factory mounted)



**Bogie PU**  
Noiseless polyurethane rollers and wheels. (Factory mounted)







# 3 TON JACK

## VANS, 4WDS AND MINIBUSES



# HIGH CAPACITY JACKS 4 - 15 TON

## TRUCKS AND BUSES



Long reach chassis improves access to lifting points deep under most vehicles.



Long reach chassis improves access to lifting points deep under trucks.

10T-C with accessory 60200





Model	Max (ton)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Kg
3T-C	3	115	500	1015	170	380	925	43

### ACCESSORIES


**1002LF**  
Rubber pad protects the lifting point.

**3068**  
Saddle for extra height or accessing lifting points situated behind skirts, etc. (+ 40 mm)



YouTube

Keyword: Compac 10T-C

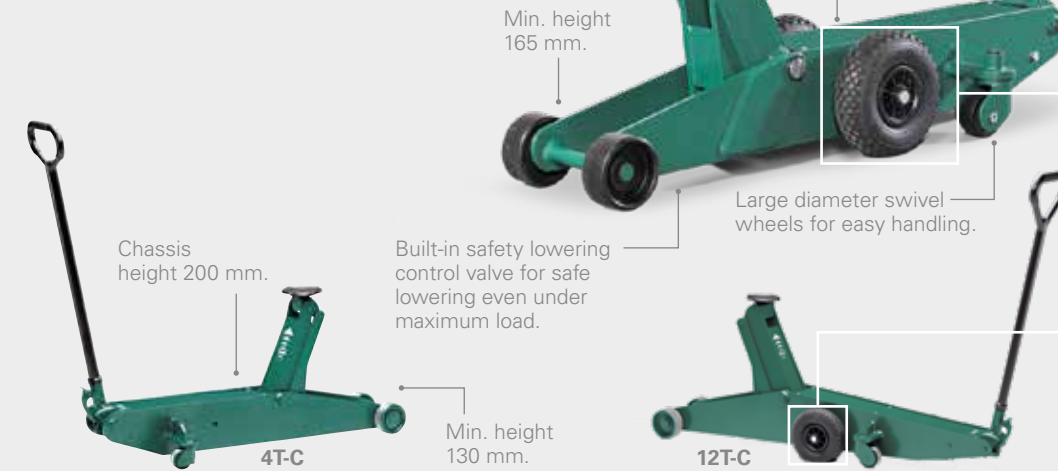

Model	Max (ton)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Kg
4T-C	4	130	545	1270	200	465	1045	75
5T-C	5	145	560	1270	200	465	1045	76
6T-C	6	155	570	1395	210	470	1045	97
10T-C	10	165	580	1410	225	435	1045	110
12T-C	12	170	670	1700	280	470	1045	148
15T-C	15	200	600	1790	325	475	1045	169




Ergonomically designed handle for operator comfort.

Quick approach foot pedal.

### ACCESSORY



**60200**  
Air rubber tyres fitted on point of balance enhance manoeuvrability of large jacks. Will flatten under load.

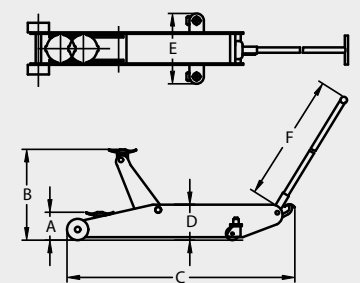





# HIGH LIFT JACKS 1,4 - 2 TON CARS



# HIGH LIFT JACKS 3 - 10 TON TRANSPORTER AND AGRICULTURAL MACHINERY



Max. height 715 mm.

1,4T-HC 77

Quick approach foot pedal.

Ultra low entry height only 77 mm.

## ACCESSORIES



Model	Nr.
1,4T-HC 77	1077
2T-HC	1002LF


Rubber pad protects the lifting point.



**Bogie PU**  
Noiseless polyurethane rollers and wheels. (Factory mounted)



**NEW PRODUCT**

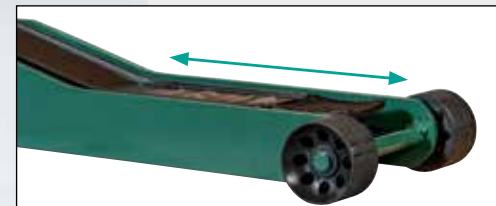


Very low profile chassis in a length of 380 mm.

Built-in safety lowering control valve for safe lowering even under maximum load.

1,4T-HC 77

Long reach profile improves access to lifting points deep under most vehicles.



Model	Max (ton)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Kg
1,4T-HC 77	1,4	77	715	1050	190	380	925	52
2T-HC	2	98	735	1035	200	380	1045	56



Max. height 860 mm.

8T-HC with accessory 60200

Ergonomically designed handle for operator comfort.



3T-HC


Built-in safety lowering control valve for safe lowering even under maximum load.

Heavy duty fully welded structure in high quality steel.

Built-in pressure relief valve prevents overloading.

Max. height 960 mm.

"Lift-and-turn" lowering system prevents unintentional lowering.

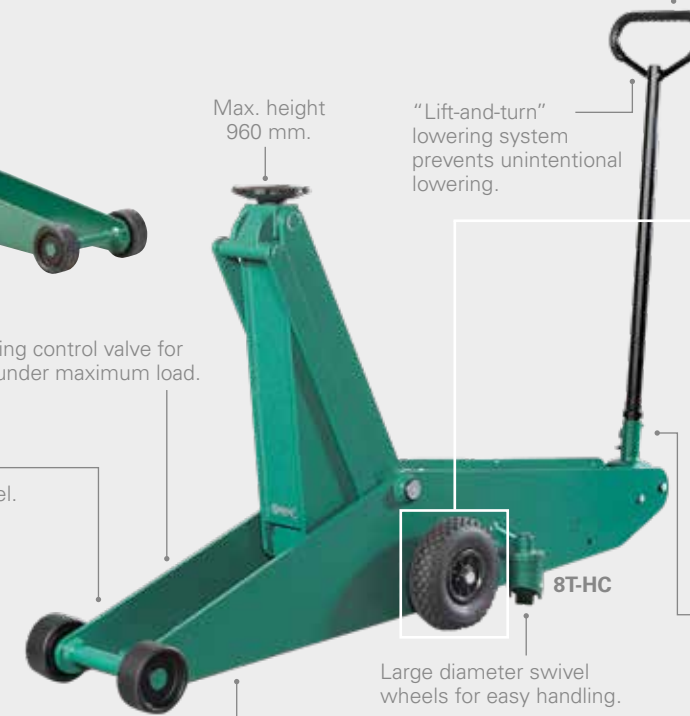

8T-HC

Large diameter swivel wheels for easy handling.


## ACCESSORY



**60200**  
Air rubber tyres fitted on point of balance enhance manoeuvrability of large jacks. Will flatten under load.



Quick approach foot pedal.

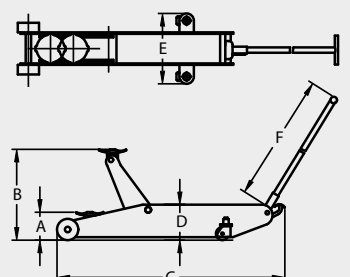

Model	Max (ton)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Kg
3T-HC	3	130	860	1620	210	460	1045	91
5T-HC	5	180	960	1830	350	475	1045	180
8T-HC	8	180	960	1830	350	475	1045	185
10T-HC	10	210	710	1700	290	475	1045	148





# AIR HYDRAULIC JACKS TRUCKS AND BUSES



# AIR HYDRAULIC JACKS TRUCKS AND AGRICULTURAL MACHINERY



A5816-C



A28-HC

## LOW TELESCOPIC JACK WITH SHORT CHASSIS AND EXTREMELY LOW TELESCOPIC JACK



A4020-C

A5816-C




YouTube Keyword: Compac A4020-C




YouTube Keyword: Compac A5816-C

Model	Max (ton)	A (mm)	B1 (mm)	B2 (mm)	B3 (mm)	B4 (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Kg
A3216-C	32/16	150	220	300	-	500	495	168	310	1230	46
A4020-C	40/20	150	220	300	-	500	495	168	310	1230	46
A5816-C	58/32/16	120	165	210	255	455	665	130	305	1360	57

### STANDARD

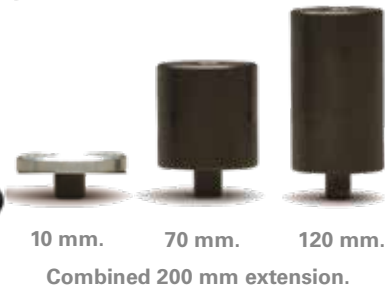

### ACCESSORIES

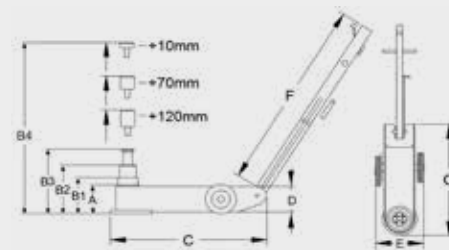

## EXTRA HIGH AIR HYDRAULIC JACK AND TELESCOPIC JACK WITH EXTRA HIGH LIFTING CAPACITY




A28-HC


A4422-C

Model	Max (ton)	A (mm)	B1 (mm)	B2 (mm)	B3 (mm)	B4 (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Kg
A28-HC	28	350	580	-	-	780	735	160	280	1230	64
A4422-C	44/22	220	341	467	-	667	525	168	300	1230	53
A5830-C	58/30	220	330	450	-	650	1050	150	350	1360	80

### STANDARD

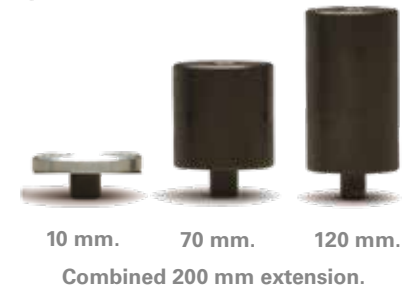

### ACCESSORIES

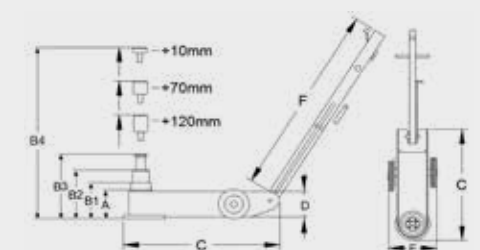





# AIR HYDRAULIC TROLLEY JACK 10 TON TRUCKS AND BUSES



# AIR HYDRAULIC TROLLEY JACK 10 TON TRUCKS AND BUSES



## ACCESSORY



3764  
Extension + 70 mm.

## AIR HYDRAULIC TROLLEY JACK 10 TON



Very good manoeuvrability. Robust construction for a long service life.

*SternPartner,  
Herr Baumgart*



Fast and quiet operation with compressed air (noise level below 70 dB).

*VEMAS,  
Herr Christian Schmidt*



Universal applications due to the variable lifting height of up to 650 mm. Easy handling for positioning under the vehicle.

*SternPartner,  
Herr Baumgart*




**NEW PRODUCT  
AIR HYDRAULIC**

A10T-C



Handle can be locked in an angle of 45 degrees for easy manoeuvring.



**You  
Tube**

Keyword:  
Compac A10T-C



Maximum lifting  
height 580 mm.

Low chassis height  
225 mm.

Fast and silent air pump. Less  
than 70 dB.

A10T-C

**AIR HYDRAULIC, FAST  
LIFTING UNDER LOAD**



Maximum lifting height 650 mm  
when using the extension.  
(Accessory 3764)



Low entry height 150 mm.



Silent wheels for the modern  
workshop.

Model	Max (ton)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Kg
A10T-C	10	150	580 (650)	1380	225	390	1200	114






# EXTREMELY LOW AIR HYDRAULIC TROLLEY JACK 1,6 TON CARS



Long reach chassis improves access to lifting points deep under vehicles.




Fast and silent air pump. Less than 70 dB.



Maximum lifting height 480 mm.

**NEW PRODUCT**  
**AIR HYDRAULIC**



**You Tube**

Keyword: Compac A1,6T-77



Extremely low chassis improves access under low vehicles.

Extremely low and long reach chassis.

Ultra low entry height only 77 mm.



Low entry height.

## ACCESSORIES



**1077**  
Rubber pad protects the lifting point.




**3068**  
Saddle for extra height or accessing lifting points situated behind skirts, etc. (+ 40 mm)



**60245**  
Hard rubber wheels. (Factory mounted)



**Bogie PU**  
Noiseless polyurethane rollers and wheels. (Factory mounted)



# HYDRAULIC BODY REPAIR KITS CARS, TRUCKS AND AGRICULTURAL MACHINERY



	CRK 4	CRK 10
1	Quick-lock tube, 400 mm.	Quick-lock tube, 475 mm.
2	Quick-lock tube, 300 mm.	Quick-lock tube, 350 mm.
3	Quick-lock tube, 200 mm.	Quick-lock tube, 250 mm.
4	Quick-lock tube, 100 mm.	Quick-lock tube, 125 mm.
5	"V" head.	"V" head.
6	Threaded toe adapter.	Threaded toe adapter.
7	Angle head.	Angle head.
8	Wedge head.	Wedge head.
9	Base.	Base.
10	Saddle.	Saddle.
11	Flexible rubber head.	Flexible rubber head.
12	Connector.	Connector.
13	Spreader. (Max 500 kg.)	Spreader. (Max 500 kg.)
14	Cylinder.	Cylinder.
15	Flexible hose, 1800 mm.	Flexible hose, 1800 mm.
16	4 ton hydraulic power unit.	10 ton hydraulic power unit.
17	Box.	Box with wheels.

**!** WARNING: The capacity of the hydraulic system exceeds the maximum of the spreader and other adapters. Please see maximum capacity per component in the instruction manual.

Model	Max (ton)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Kg
A1,6T-77	1,6	77	480	950	126	380	925	44







# WHEEL LIFTER CARS, VANS AND 4WD



# WHEEL DOLLY TRUCKS AND BUSES



YouTube

Keyword:  
Compac WD 60

Easy access to wheel bolts. The wheel is positioned away from the main piston.

Capacity: 60 kg. (Outside diameter max. 820 mm.)




Rollers with ball bearings for easy rotation and positioning.




No heavy, manual lifting. The wheel lifter lifts the wheels straight from the floor.



WD 60



Effortless foot operated lifting.

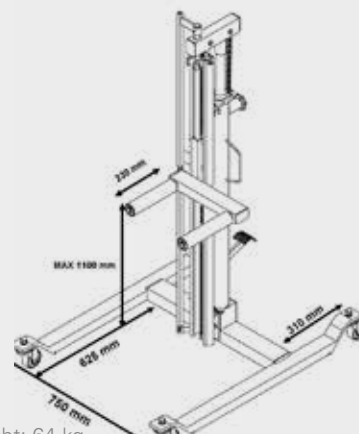

Weight: 64 kg.

## EASY AND SAFE MOUNTING, DEMOUNTING AND HANDLING OF HEAVY WHEELS FOR TRUCKS AND BUSES. IDEAL FOR SERVICE TRUCKS

Extra support wheels for easy and safe maneuvering even when fully loaded.

Rollers with ball bearings for easy rotation and positioning of wheels onto hubs.

Capacity 250 kg.


Weight: 14 kg.




WD Mobile

Ergonomical handle makes the wheel dolly easily controllable by just one mechanic.

Spring loaded support for fast and easy storing without load.



Capable of handling wheels up to size 445/65 - 22,5".



The rollers have three positions each side for different wheels sizes.

## IDEAL FOR HANDLING LARGE, HEAVY WHEELS ON TRUCKS, BUSES AND VANS

Max. lifting height 665 mm.

Dual rollers fitted with bearings for separate rotation and positioning of wheels.



WD 800

Capacity 800 kg.



Weight: 122 kg.



Ideal for lifting heavy twin wheels.



Sliding arms. Enables handling of wheels with diameter from Ø 545 mm - 1278 mm.



Position of cylinder provides clear access to operating area through the open frame.





# WHEEL LIFTER

## AGRICULTURAL AND EARTH MOVING MACHINERY



# WHEEL LIFTER

## AGRICULTURAL AND EARTH MOVING MACHINERY




### EASY AND SAFE MOUNTING, DEMOUNTING AND HANDLING OF LARGE WHEELS UP TO 2400 MM



Capable of handling large wheels from 1250 mm up to 2400 mm in diameter and up to 1050 mm in width.



2 x 4 large rollers improve handling of tyres with deep treads.



Large open working area, due to the built-in hydraulic.




Hands-free switch between lifting and lowering action.



Mobile: Easy to use outside the workshop. Disassembled in a few seconds.



Keyword:  
Compac WD 1600

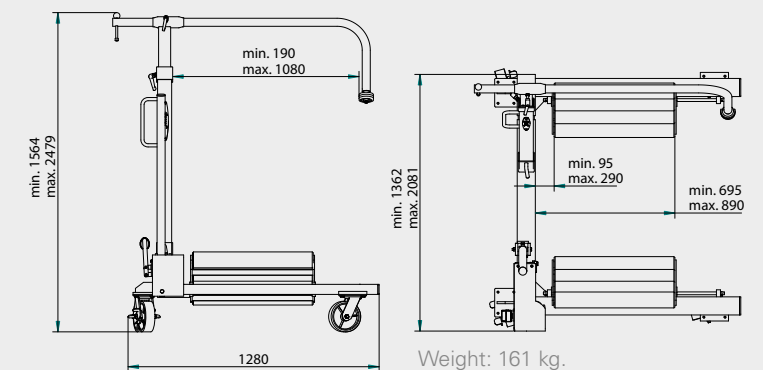





# WORKSHOP CRANES CARS



# WORKSHOP CRANES CARS AND INDUSTRIAL USE



## ACCESSORIES





**939010**  
Load sling.  
Capacity 500 kg.



Foldable. Takes up limited space when not in use. (36 x 42 cm)

The extra long reach of the lifting arm enables easy lifting of engines on modern cars.

Swivel pump handle position enables easy operation by just one mechanic.

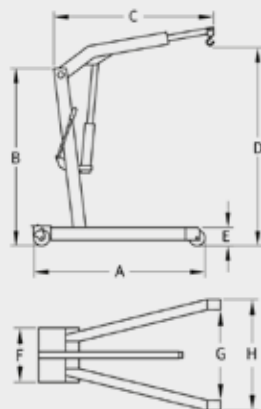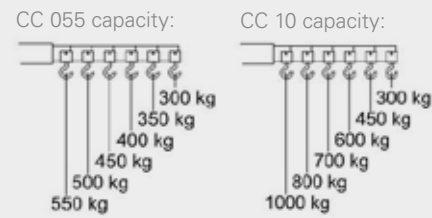


Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Kg
CC 055	1530	1500	Min. 985 Max. 1435	2120 Max. 550 kg. 2455 Max. 300 kg.	88	440	865	1020	103
CC 10	1530	1500	Min. 985 Max. 1435	2120 Max. 1000 kg. 2455 Max. 300 kg.	88	440	865	1020	103



The industrial workshop crane fits around a standard EUR pallet.

CC 15P capacity:

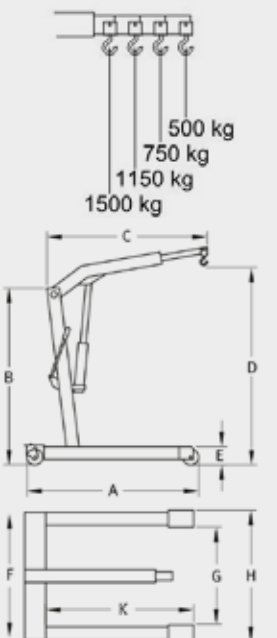

Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	K (mm)	Kg
CC 15P	1720	1860	Min. 1370 Max. 1820	2745 Max. 1500 kg. 3110 Max. 500 kg.	200	1000	850	1015	1570	147





# UNIVERSAL TRANSMISSION JACKS CARS AND VANS



# ACCESSORIES FOR TRANSMISSION JACKS CARS AND VANS




53012/53015

939014




Reversible transmission adaptor with saddle and rubber pad.

Ideal for handling and supporting exhaust systems, fuel tanks, etc.

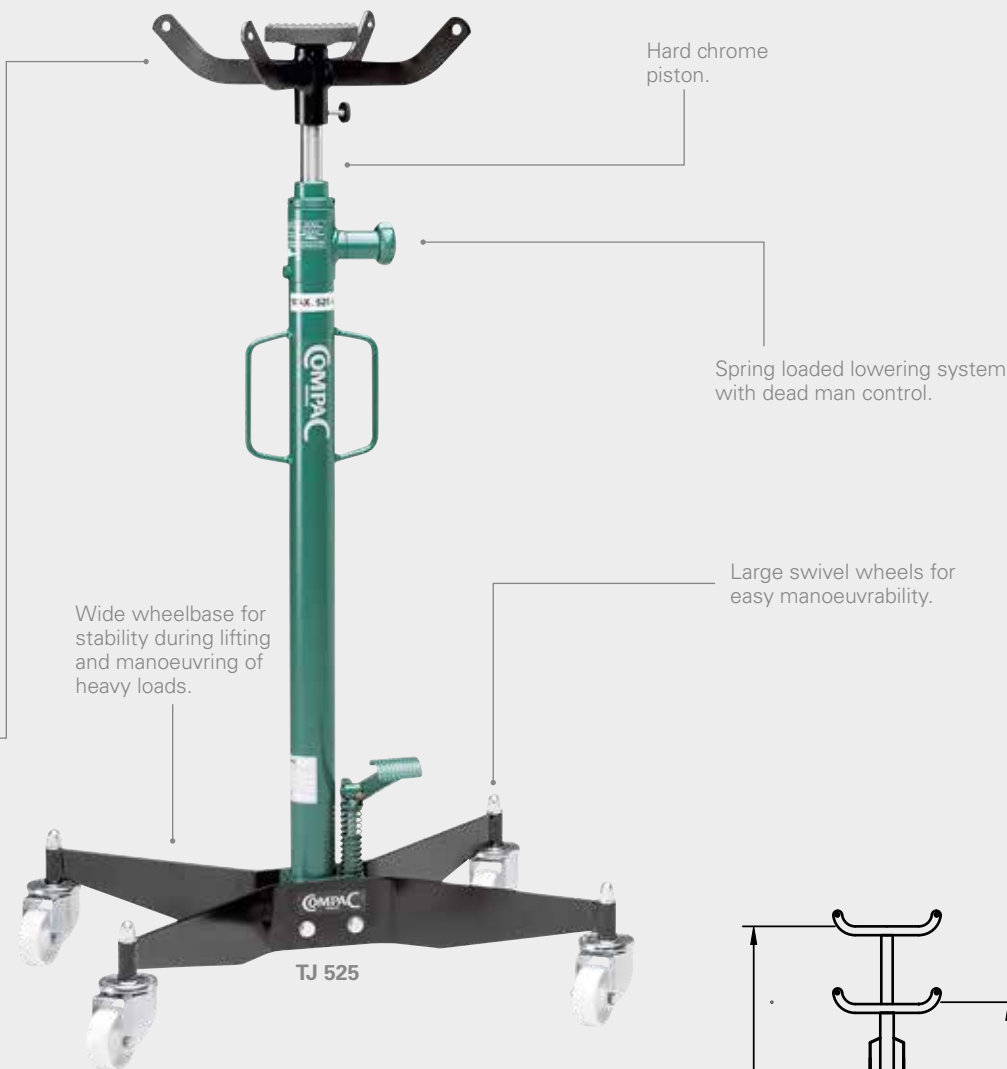

TJ 525

Model	Max (kg)	A (mm)	B (mm)	C (mm)	D (mm)	Kg
TJ 300	300	1095	1930	465 x 565	60	24
TJ 325	325	1170	2020	595 x 535	80	30
TJ 525	525	1170	2020	595 x 535	80	32
TJ 1000	1000	1170	2000	595 x 535	100	38

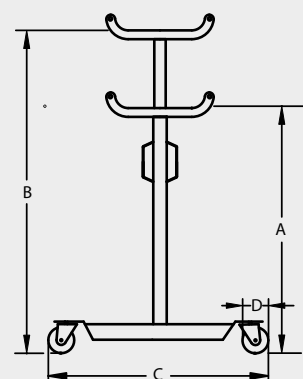

## ACCESSORIES



Model	Nr.
TJ 300	53012
TJ 325	53012
TJ 525	53012
TJ 1000	53015
TJ-T 1300	53015

**McPherson strut support.**  
For supporting and holding the suspension strut when working on the wheel suspension.

The McPherson strut support prevents the strut from moving downwards when dismantling the suspension strut from the transverse link.



Model	Nr.
TJ 300	53004
TJ 325	53004
TJ 525	53005
TJ 1000	53006
TJ-T 1300	53006

**Fluid drain pan with adapter.**  
Oil drain pan 18,9 litre. Ideal for fast and easy oil changes.




Model	Nr.
TJ 300	53010
TJ 325	53010
TJ 525	53011
TJ 1000	53013
TJ-T 1300	53013

**Adapter.**  
Adapter without the four arms. Enhances access to areas with limited space.



Model	Nr.
TJ 300	-
TJ 325	-
TJ 525	939014
TJ 1000	939014
TJ-T 1300	939014

**Adjustable transmission tool.** Tilts in 2 angles to enable positioning and safe handling of transmissions. Capacity 300 kg.







# TELESCOPIC TRANSMISSION JACK CARS, VANS AND 4WD




# TELESCOPIC TRANSMISSION JACK TRUCKS AND BUSES



939014


## ACCESSORIES



**939014**  
Adjustable transmission tool. Tilts in 2 angles to enable positioning and safe handling of transmissions.

Capacity 300 kg.

## ACCESSORIES



**939007**  
Adjustable transmission tool tilts to enable positioning and safe handling of transmissions.

Capacity 1000 kg.





Model	Max (ton)	A (mm)	B1 (mm)	B2 (mm)	C (mm)	D (mm)	Kg
TJ-T 1300	1.3 / 0.5	1000	1500	2010	760 x 640	100	65




Reversible transmission adaptor with saddle and rubber pad.

Ideal for handling and supporting exhaust systems, fuel tanks, etc.

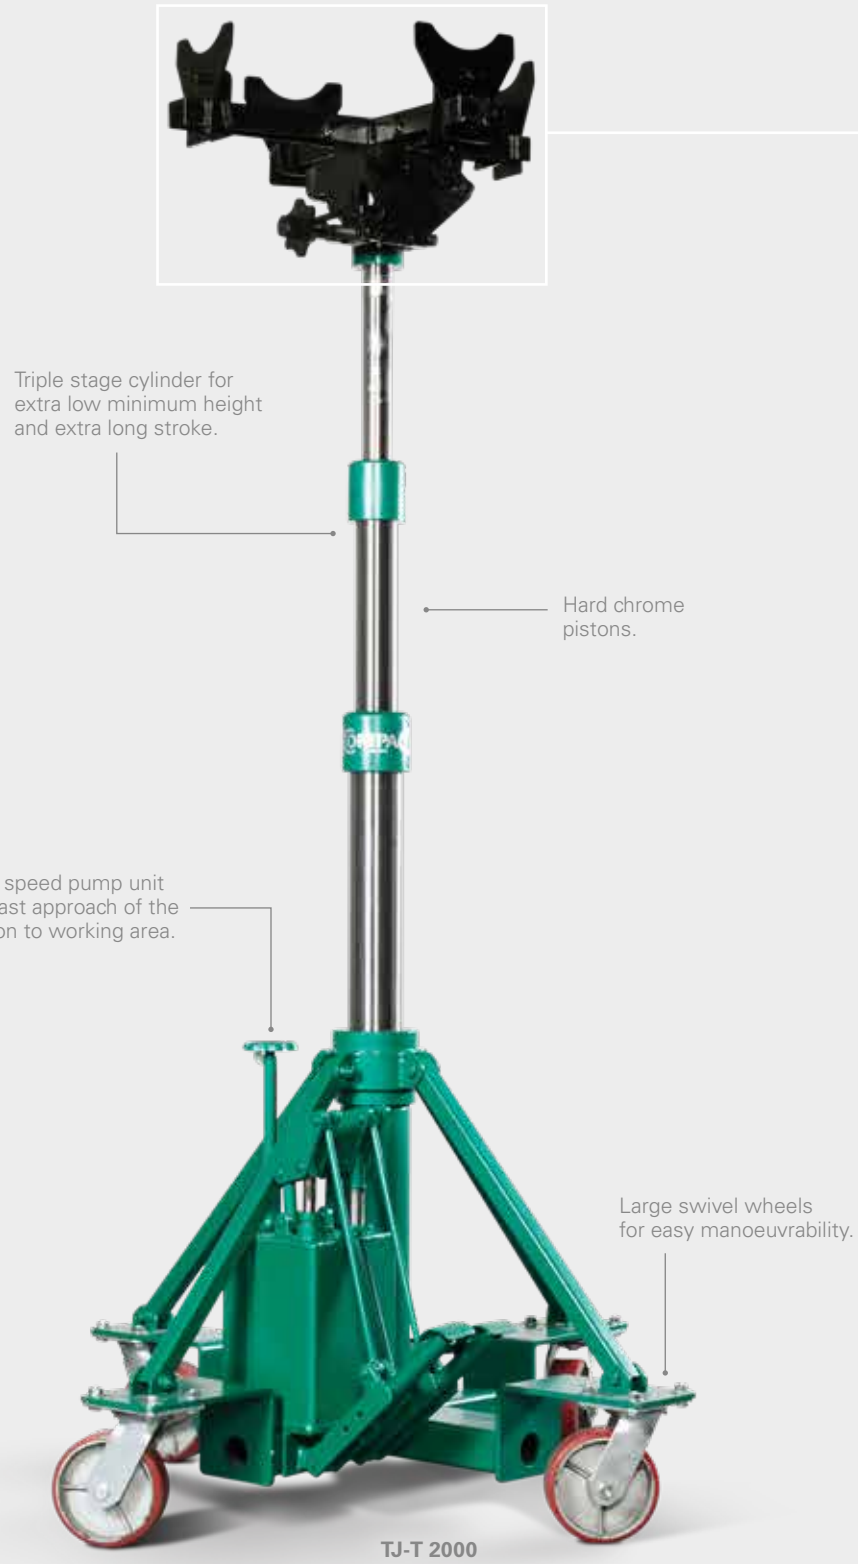

Model	Max (ton)	A (mm)	B1 (mm)	B2 (mm)	B2 (mm)	C (mm)	D (mm)	Kg
TJ-T 2000	2.0 / 1.0 / 1.0	960	1320	1600	1910	1050 x 1050	150	106








# SPRING COMPRESSOR CARS AND VANS



# SPRING COMPRESSOR CARS AND VANS



## EFFICIENT, PROFESSIONAL AND SAFE DISMOUNTING AND MOUNTING OF MCPHERSON "STRUTS"

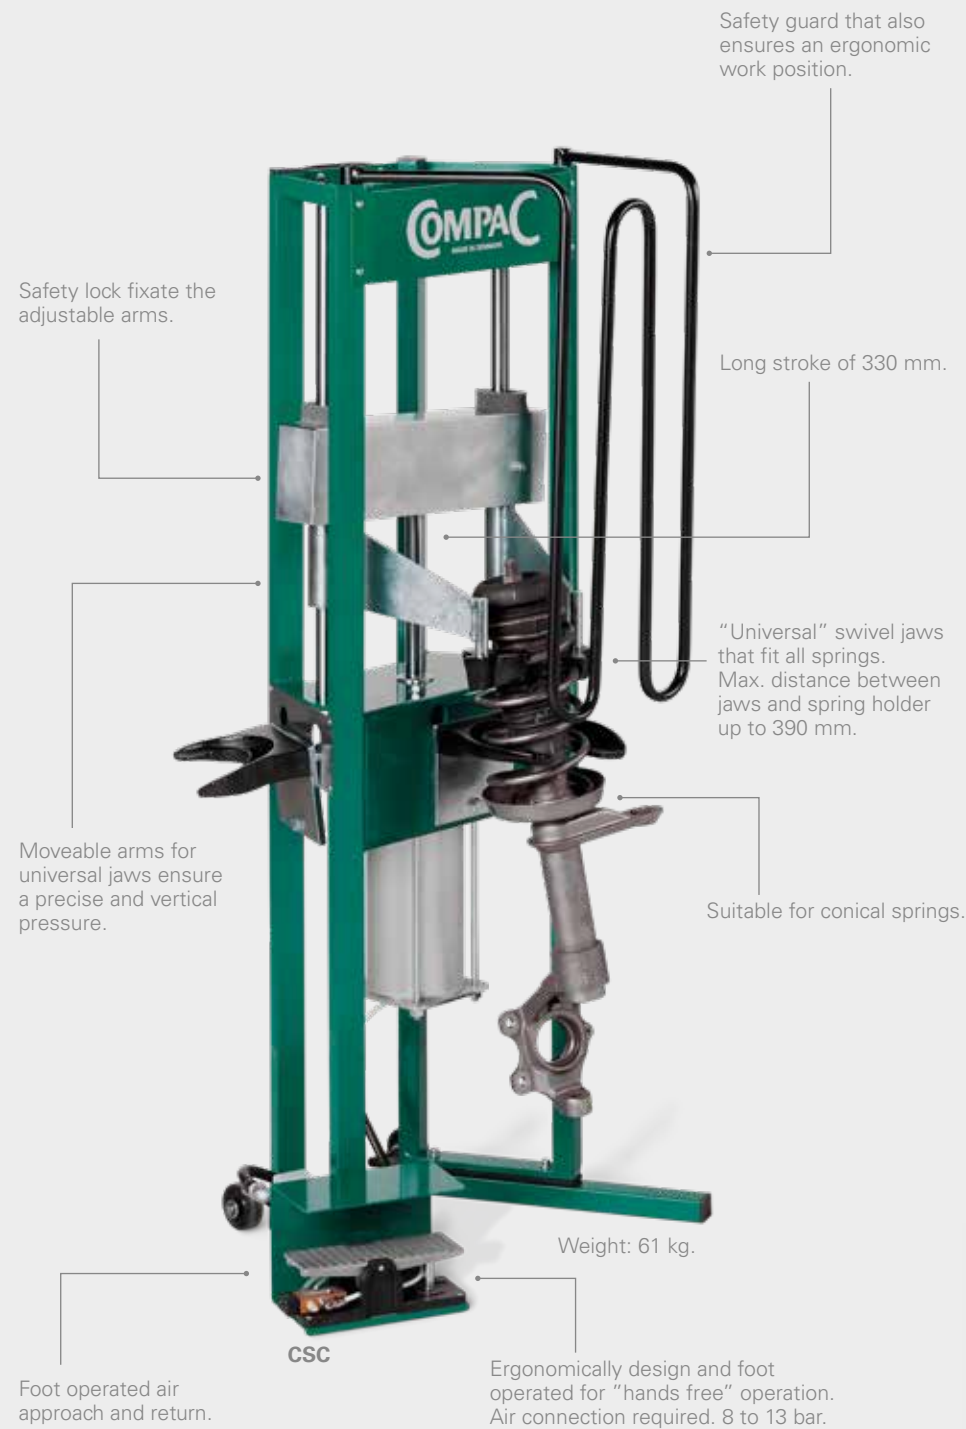

### STANDARD



**2 spring holders**  
(Ø78 - 125 mm and Ø125 - 200 mm)

### ACCESSORIES



**929050**  
Universal strut vice.




McPherson strut mounted in strut vice. Accessory 929050.



Enough power to compress strong springs on vehicles like Ducato, Jumper and Boxer.



Mobile. Easily moved between workstations. Ready for use in a matter of seconds.



You  
Tube

Keyword:  
Compac CSC

Easy access to mounting and demounting of the top nut.



## VEHICLE SPECIFIC SOLUTIONS



**929052**  
Mercedes A, B, C and E Class bracket (C-class until 2009).



**929059**  
Mercedes C-class bracket from 2010 and later.



**929051**  
Spring holder Ø105 - 182 mm. Recommended for: Renault Megane, Renault Clio, Citroën C2, Citroën C3, Peugeot 207, Peugeot 208, Peugeot 307, Fiat Multipla. (Also included in Mercedes kit 929052)



**929053**  
Low lip jaws.



**929060**  
Renault Koleos, Renault Laguna, Nissan Qashqai bracket.



**929057**  
Strut vise for Chrysler Voyager and Mercedes.





# FOOT OPERATED WORKSHOP PRESSES 16 - 25 TONS CARS AND VANS



# HAND OPERATED WORKSHOP PRESSES 20 - 25 TONS CARS AND VANS




## ACCESSORIES




**61248**  
Universal bearing  
removal support.




Moveable cylinder.



Foot operated air approach  
feature. (FP 20/FP 25)



Model	Max (ton)	(mm/stroke)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	Kg
FP 16	16	6,0/2,0	1200	550	140	150	65	40	1780	850	600	121
FP 20	20	9,0/1,1	825	600	140	240	90	70	1800	890	505	156
FP 25	25	9,0/1,1	825	600	140	240	90	70	1800	890	505	157

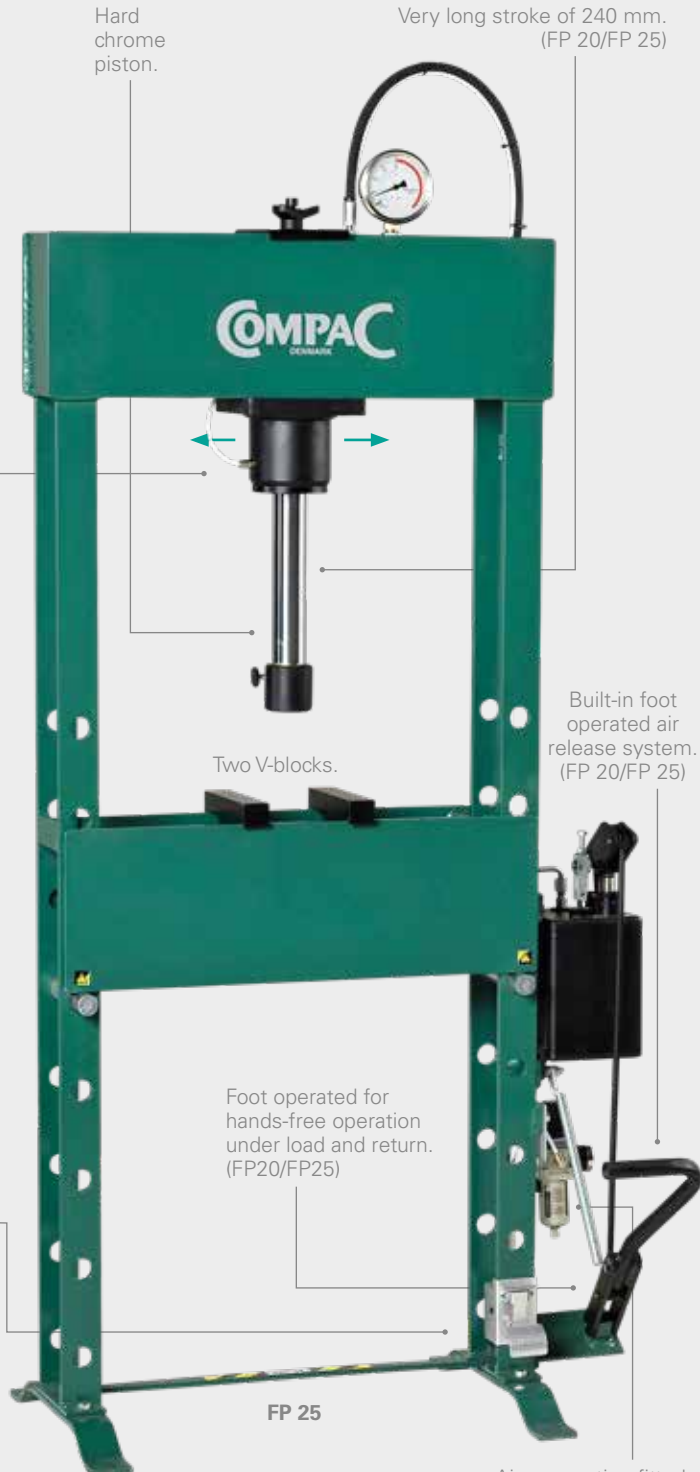

Hard chrome piston.  
Very long stroke of 240 mm. (FP 20/FP 25)

Two V-blocks.

Built-in foot operated air release system. (FP 20/FP 25)

Foot operated for hands-free operation under load and return. (FP20/FP25)

FP 25

Air connection fitted with water separator. (FP 20/FP 25)

## ACCESSORIES



**61100**  
Press plate.



**61240**  
Shelves for storing.



Model	Nr.
FP 16	61219
FP 20	61216
FP 25	61216

**Press punches.**  
7 pieces, Ø12, 16, 18, 20, 22, 25, 30.



Model	Nr.
FP 16	61220
FP 20	61218
FP 25	61218

**Bearing removal kit.**  
4-pieces, Ø 64, 67, 72, 75.



**61242**  
Protection guard.


## ACCESSORIES




**61248**  
Universal bearing  
removal support.



Moveable cylinder.



Foot operated air approach  
feature.



Model	Max (ton)	(mm/stroke)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	Kg
HP 20	20	9,0/4,0	825	600	140	240	90	70	1800	890	505	156
HP 25	25	9,0/4,0	825	600	140	240	90	70	1800	890	505	157



Hard chrome piston.  
Very long stroke of 240 mm.

Two V-blocks.

Built-in air release system in handle.

HP 25

Air connection fitted with water separator.

## ACCESSORIES



**61100.**  
Press plate.



**61240**  
Shelves for storing.



Model	Nr.
HP 20	61216
HP 25	61216

**Press punches.**  
7 pieces, Ø12, 16, 18, 20, 22, 25, 30.



Model	Nr.
HP 20	61218
HP 25	61218

**Bearing removal kit.**  
4-pieces, Ø 64, 67, 72, 75.



**61242**  
Protection guard.





# FOOT OPERATED WORKSHOP PRESSES 40 - 50 TONS VANS, TRUCKS AND BUSES



# HAND OPERATED WORKSHOP PRESSES 40 - 100 TONS VANS, TRUCKS AND BUSES



## ACCESSORIES



**61248**  
Universal bearing  
removal support.


Model	Nr.
FP 40	61248
FP 50	61248



Fast and safe  
adjustment of the press table  
height, using a braked winch.



Foot operated air approach  
feature.



Model	Max (ton)	(mm/stroke)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	Kg
FP 40	40	6,0/1,0	750	840	200	300	125	70	1990	1350	630	375
FP 50	50	6,0/1,0	750	840	200	300	125	70	1990	1350	630	375



## ACCESSORIES



**61100**  
Press plate.



**61240**  
Shelves for  
storing.



Model	Nr.
FP 40	61216
FP 50	61216

**Press punches.**  
7 pieces, Ø12, 16, 18, 20,  
22, 25, 30.



Model	Nr.
FP 40	61218
FP 50	61218

**Bearing removal kit.**  
4 pieces, Ø 64, 67, 72, 75.



Model	Nr.
FP 40	61243
FP 50	61243

**Protection guard.**

## ACCESSORIES



**61248**  
Universal bearing  
removal support.

Model	Nr.
HP 40	61248
HP 50	61248
HP 60	-
HP 70	-
HP 100	-



Fast and safe  
adjustment of the press table  
height, using a braked winch.



Foot operated air approach  
feature.



Model	Max (ton)	(mm/stroke)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	Kg
HP 40	40	6,0/2,0	750	840	200	300	125	70	1990	1350	630	374
HP 50	50	6,0/2,0	750	840	200	300	125	70	1990	1350	630	374
HP 60	60	5,0/0,8	760	1005	255	300	160	80	2100	1615	710	690
HP 70	70	5,0/0,8	760	1005	255	300	160	80	2100	1615	710	690
HP 100	100	3,4/0,8	915	1035	305	300	200	100	2200	1637	800	946

## ACCESSORIES



**61100**  
Press plate.



**61240**  
Shelves for  
storing.



Model	Nr.
HP 40	61216
HP 50	61216
HP 60	61228
HP 70	61228
HP 100	61233

**Press punches.**  
7 pieces, Ø12, 16, 18, 20,  
22, 25, 30.



Model	Nr.
HP 40	61218
HP 50	61218
HP 60	61229
HP 70	61229
HP 100	61234

**Bearing removal kit.**  
4 pieces, Ø 64, 67, 72, 75.



Model	Nr.
HP 40	61243
HP 50	61243
HP 60	61245
HP 70	61245
HP 100	61247

**Protection guard.**





# ELECTRO-HYDRAULIC WORKSHOP PRESSES 40 - 60 TON WITH SINGLE ACTING CYLINDER



# ELECTRO-HYDRAULIC WORKSHOP PRESSES 40 - 100 TON WITH DOUBLE ACTING CYLINDER



## ACCESSORIES



**61248**  
Universal bearing  
removal support.

Model	Nr.
EP 40	61248
EP 60	-

**Single acting cylinder:**  
One-way pressing action for where heavy tooling is not to be mounted on the piston.


Pressure gauge.  
Moveable cylinder.  
Very long stroke of 300 mm.  
Hard chrome piston.



Fast and safe adjustment of the press table height, using a braked winch.



A 90° hinged pump unit enables easier insertion of longer work-pieces.



Model	Max (ton)	(mm/stroke)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	Kg	Kw
EP 40	40	10,0	750	840	200	300	125	70	1990	1480	630	390	2,2
EP 60	60	10,0/5,0	760	1000	255	300	160	80	2100	1680	710	694	2,2

## ACCESSORIES



**61100**  
Press plate.



**61240**  
Shelves for storing.



Model	Nr.
EP 40	61216
EP 60	61228

**Press punches.**  
7 pieces, Ø12, 16, 18, 20, 22, 25, 30.



Model	Nr.
EP 40	61218
EP 60	61229

**Bearing removal kit.**  
4 pieces, Ø 64, 67, 72, 75.



Model	Nr.
EP 40	61243
EP 60	61245

**Protection guard.**

## ACCESSORIES



**61248**  
Universal bearing  
removal support.

Model	Nr.
EP 40 D	61248
EP 60 D	-
EP 100 D	-

**Double acting cylinder:**  
Featuring both pressing and pulling facilities.

Very long stroke of 300 mm.  
Moveable cylinder.  
Hard chrome piston.  
Flange for fitting of tooling.  
Pressure gauge.




Fast and safe adjustment of the press table height, using a braked winch.



A 90° hinged pump unit enables easier insertion of longer work-pieces.

Wide insertion width.

Multi-adjustable pressure valve.



Model	Max (ton)	(mm/stroke)	Max (ton)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	Kg	Kw
EP 40 D	40	10,0	6	750	840	200	300	125	70	1990	1480	630	396	2,2
EP 60 D	60	10,0/5,0	6	760	1000	255	300	160	80	2100	1680	710	702	2,2
EP 100 D	100	10,0/1,4	4	915	1035	305	300	200	100	2200	1780	800	981	2,2

## ACCESSORIES



**61100**  
Press plate.



**61240**  
Shelves for storing.



Model	Nr.
EP 40 D	61216
EP 60 D	61228
EP 100 D	61233

**Press punches.**  
7 pieces, Ø12, 16, 18, 20, 22, 25, 30.



Model	Nr.
EP 40 D	61218
EP 60 D	61229
EP 100 D	61234

**Bearing removal kit.**  
4 pieces, Ø 64, 67, 72, 75.



Model	Nr.
EP 40 D	61243
EP 60 D	61245
EP 100 D	61247

**Protection guard.**






# AXLE STANDS 2 - 12 TON BOTTLE JACKS 3 - 50 TON CARS, TRUCKS AND AGRICULTURE



SHARK&CO.




## AXLE STANDS

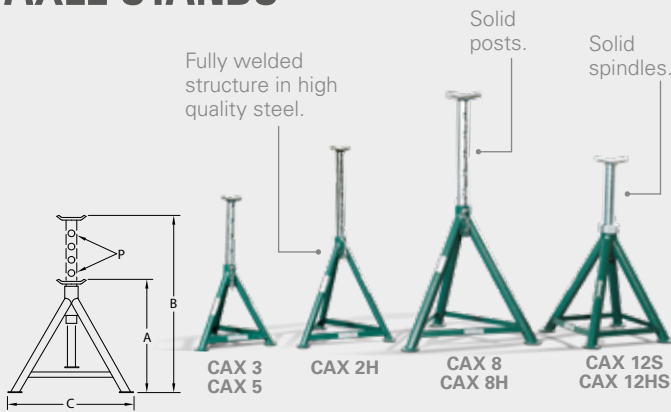

Model	Max (ton)	A (mm)	B (mm)	C (mm)	P	Kg
CAX 2H	2	505	755	491	5	6,6
CAX 3	3	346	510	325	5	4,7
CAX 5	5	406	567	355	5	7,2
CAX 8	8	424	633	403	5	11,5
CAX 8H	8	605	870	575	6	15
CAX 12S	12	320	500	230	Spindel	11,6
CAX 12HS	12	475	725	395	Spindel	15

## BOTTLE JACKS



Model	Max (ton)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Kg
CBJ 3	3	193	120	60	373	110x103	26	3
CBJ 5	5	210	136	70	416	122x115	30	3,9
CBJ 10	10	230	150	80	460	132x120	36	5,6
CBJ 15	15	230	150	60	440	144x134	43	7,2
CBJ 20	20	242	150	60	452	159x143	46	9,2
CBJ 30	30	275	165	-	440	169x153	49	11,9
CBJ 50	50	265	160	-	425	210x176	83	25,8
CBJ-T 10	10	215	247	78	540	150x145	37	9,3

Compac reserves the right to discontinue products, change prices and to supply products that may differ from the illustrations and specifications.

### Compac Hydraulik A/S

Strandhusevej 43 // 7130 Juelsminde // Denmark // Tel: +45 75 69 37 22 // info@compac.dk  
www.compac.dk